

# MINIBOOSTER

- Rotary Compressors




ULTRA  
LOW  
NOISE

BOXED  
SOLUTION

EASY TO  
INSTALL

STANDARDISED  
PRODUCT

BESTSELLER

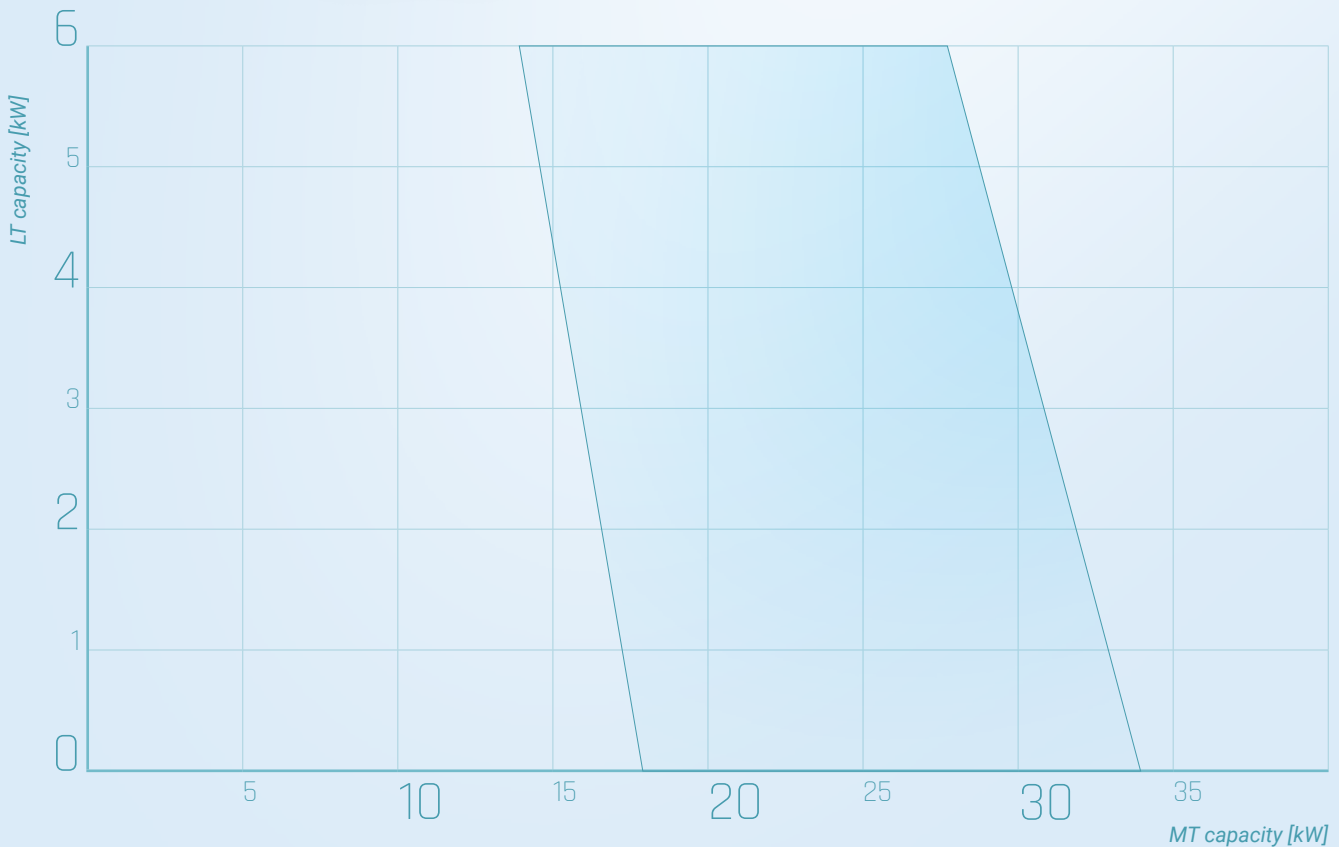

## MODELS AVAILABLE

### Frame size

**4x2**

Max No. of MT Compressors	4
Max No. of LT Compressors	2
Max Capacity MT [kW]*	34
Max Capacity LT [kW]*	6
Receiver Volume [L]	53
Height [mm]	2,200
Length [mm]	1,000
Width [mm]	800
Approx. Weight [kg]	550

\*All capacities are calculated at -8°C MT, -30°C LT and 35°C out of the gas cooler

## STANDARD EQUIPMENT

Frequency Inverter on all Compressors  
Patented Internal Heat Exchanger in Receiver

## CONTROLLERS AVAILABLE

Carel

## STANDARD DESIGN PRESSURES

High Pressure: 130 bar  
Receiver Pressure: 80 bar  
MT Suction Pressure: 60 bar  
LT Suction Pressure: 60 bar

## OPTIONS AVAILABLE

MT Only  
Discharge Manifold  
Connected Safety Valves  
Simple Heat Recovery  
Energy Meter  
Enclosure for Low Noise and Outdoor Installation  
120 bar high pressure

*ISO 9001:2015 certified  
Extensive factory tests to ensure fast commission  
on both pressure and electrical installations  
Documentation and manuals that meet legal  
requirements*